

META MT



Unrivaled Efficacy 130 lm/W

- AG plated reflection
- Vertical convection cooling (LED & Heat sink)
- Wireless lighting control
- Built-in 20 KVA surge protection device
- Easy-to-install junction box



Application

Highway, Roadway, Street


IP 66

Specification

* Tolerance : ± 5%

Model	Power	* Luminous Efficacy	* Luminous Flux	Color Temperature	CRI	Weight	Life Time	Input Voltage	Operation Temperature
MT100	100W		13,000 lm						
MT130	130W	130 lm/W	16,900 lm	3000K, 4000K	80 Ra	8.0 Kg 17.6 lb	50,000hrs	AC100~277V AC100~240V	-30°C~60°C -22°F~140°F
MT150	150W		19,500 lm	5000K					
MT180	180W		23,400 lm						
Body	Cast Aluminum			Mounting Option	Horizontal Tenon Mount			Control System	Wireless (ZigBee) / Photo Sensor (KMW Own)
Cover	Tempered Glass 4T (Clear)			Mount Hole	Ø2.38 in. (Ø60.5mm) Pipe Applied			Option	more details of GeSS at p.36
Finish	Powder Coating			Light Distribution	Type III-S				Junction Box

Dimension

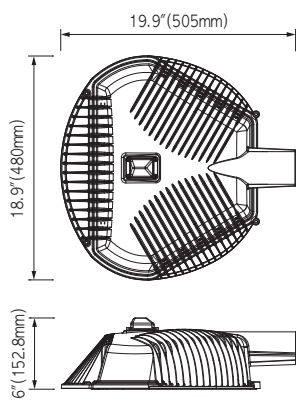

Photometry

